



Junction Boxes

Geosense® Junction Boxes allow multiple sensor cables to be connected into one multi-core cable thus reducing the cost of cabling and installation

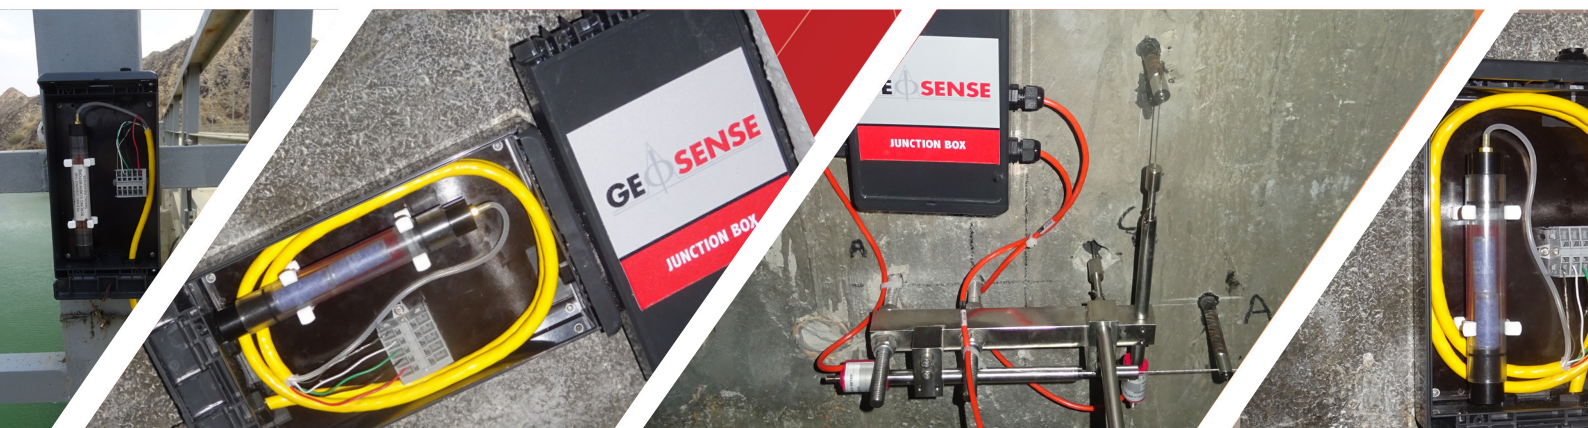

Junction Boxes

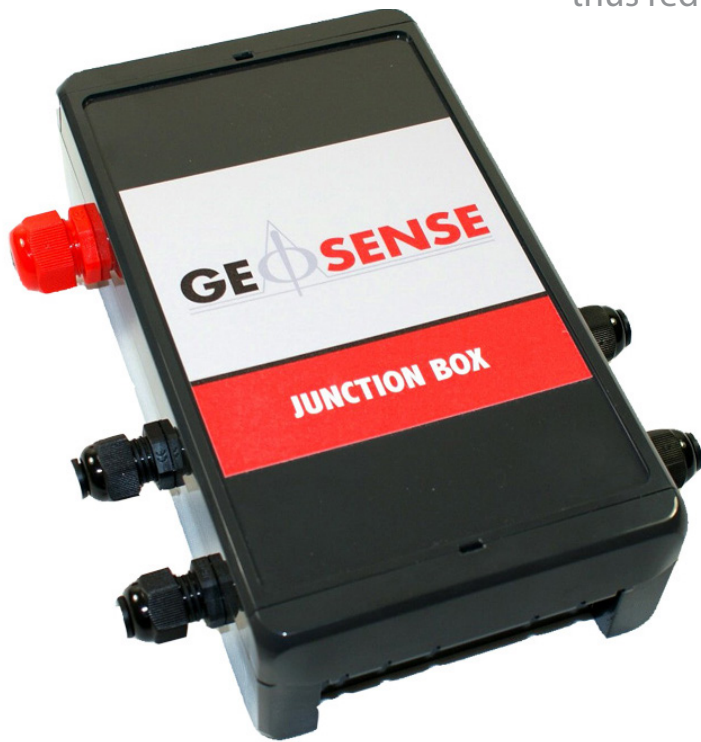

Overview



Geosense® Junction Boxes allow multiple sensor cables to be connected into one multi-core cable thus reducing the cost of cabling and installation.

Fitted with a series of four pole spring pressure connectors, they are quick and easy to wire and provide vibration-proof and maintenance-free connections, unlike traditional screw terminals.

The input and output connections are colour-coded for easy identification and the simple hinged quick-release catch lid makes access fast and simple.

Made from lightweight, corrosion resistant and tough ABS material with waterproof rating to IP67, they can be used in the harshest of environments associated with construction.

APPLICATIONS

- Joining multiple sensors to a single multicore cable
- Providing central location for manual readings
- Protecting sensors and cables from overvoltage protection

FEATURES

- Lightweight impact resistant ABS box
- Corrosion free
- Waterproof to IP67 rated
- Robust four pole terminal strips
- Easy & quick to wire
- Conductor sizes from 28-12 AWG
- Spring Pressure Connection Technology
- Vibration-Proof connections
- Maintenance-free connections
- Colour-coded glands for IN & OUT
- Simple hinged quick-release catch lid
- Up to 10 sensors can be connected



Junction Boxes

Specifications

MODEL	INPUT SIZE	OUTPUT SIZE	NO OF 4 POLE CONNECTORS	NO OF SENSOR INPUTS*	MAX OUTPUT CONDUCTORS	DIMENSION (L X W X H)
JB-1	1 x M16	1 x M16	1	5	5	113 X 80 X 60
JB-2	2 x M16	1 x M20	2	10	10	113 X 80 X 60
JB-3	3 x M16	1 x M20	3	15	15	231 X 125 X 60
JB-4	4 X M16	1 X M20	4	20	20	231 X 125 X 60
JB-5	5 X M16	1 X M20	5	25	25	231 X 125 X 60
JB-6	6 X M16	1 X M20	6	30	30	231 X 125 X 60
JB-7	6 X M16	2 X M20	6	30	30	231 X 125 X 60
JB-8	7 X M16	1 X M20	7	35	35	231 X 125 X 60
JB-9	7 X M16	2 X M20	7	35	35	231 X 125 X 60
JB-10	8 X M16	2 X M20	8	40	40	271 X 170 X 60
JB-11	9 X M16	1 X M20	9	45	45	271 X 170 X 60
JB-12	9 X M16	2 X M20	9	45	45	271 X 170 X 60
JB-13	10 X M16	1 X M20	10	50	50	271 X 170 X 60
JB-14	10 X M16	2 X M20	10	50	50	271 X 170 X 60

* Number of sensor inputs is based on a maximum of 5 conductors typically for vibrating wire as follows:


1 - V+ (vibrating wire)

2 - V- (vibrating wire)

3 - T+ (temperature)

4 - T- (temperature)

5 - S (shield)

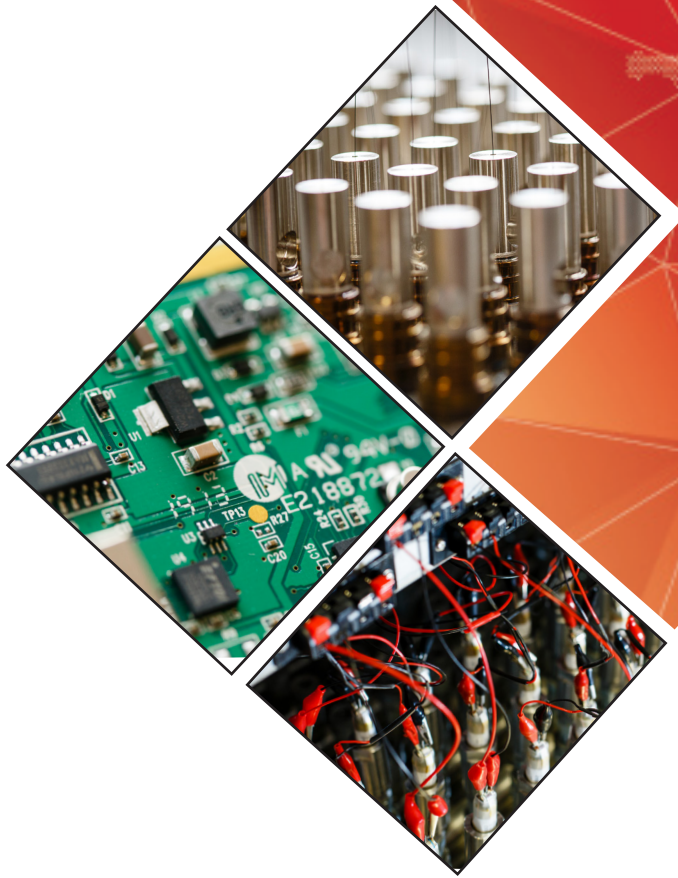

HEAD OFFICE

Nova House
Rougham Industrial Estate
Rougham, Bury St Edmunds
Suffolk IP30 9ND
England

+44 (0)1359 270457
sales@geosense.com
support@geosense.com

NORTH AMERICA OFFICE

15 West 38th Street
Suite 632
New York
NY 10018

+1 518-920-3483
sales@geosense.com
support@geosense.com

www.geosense.com

Specifications are subject to change without notice and should not be construed as a commitment by Geosense. Geosense assumes no responsibility for any errors that may appear in this document. In no event shall Geosense be liable for incidental or consequential damages arising from the use of this document or the systems described in this document. All Content published or distributed by Geosense is made available for the purposes of general information. You are not permitted to publish our content or make any commercial use of our content without our express written consent. This material or any portion of this material may not be reproduced, duplicated, copied, sold, resold, edited, or modified without our express written consent.