

## Wi-SOS 480 Wireless Tilt Meter

This tilt meter combines a high-precision biaxial MEMS sensor with a radio transmission network to provide accurate measurements with the benefits of long-range wireless communication and extended battery life



# Wi-SOS 480 Wireless Tilt Meter



## Overview



The Geosense® Wi-SOS 480 Wireless Tilt Meter is used for long-range, remote readings in geotechnical monitoring applications.

The tilt meter combines a high-precision biaxial MEMS sensor with a radio transmission network to provide accurate measurements with the benefits of long-range wireless communication and extended battery life.

What makes Wi-SOS 480 different to other wireless systems is the use of data modulation via the Worldsensing G6 Platform which uses the latest LoRa spread spectrum technology. This technology means Long Range, Low Cost, Low Power Consumption and High Connectivity.

Each unit is individually calibrated to provide the ultimate in system accuracy and repeatability.

Several hundred Wireless Tilt Meters can be supported by one Gateway in the same network and it can also be used as a stand-alone logger for manual monitoring, capable of storing up to 200,000 readings.

It can easily be configured and connected with a USB cable and an Android device. Connectivity to the Gateway can be checked in the field and its global location displayed via the Wi-SOS WebCentre.

## APPLICATIONS

Monitoring tilt in:

Retaining & diaphragm walls

Rail tracks

Party walls

Structures

Tunnels

Bridges

Slopes

Piles

Concrete dams

## FEATURES

Highly accurate and reliable biaxial tilt sensor

Individual calibration UKAS traceable

Long-range 868/915MHz radio

Long-range communications (up to 15km)

Low-power LoRa® spread spectrum technology

Up to 8 years battery life

Robust, small and weather-proof box for harsh environments

Easy configuration

User-friendly configuration with Android device

Web browser software

Standard CSV download, FTP push and API access

WORLD  SENSING



# Wi-SOS 480 Wireless Tilt Meter

## Specifications

### GENERAL

|                                    |                         |
|------------------------------------|-------------------------|
| Battery life – sampling rate 5 min | 1.2 years               |
| Battery life – sampling rate 1 h   | 5.8 years               |
| Battery life – sampling rate 6 h   | 8.3 years               |
| Battery type                       | 2 x 3.6V C-Size Lithium |
| Sampling rate                      | 30 seconds to 1 day     |
| Configuration software             | Android App, G-LOG      |

### SENSOR

|                               |  |
|-------------------------------|--|
| Type                          | MEMS (Micro-Electro-Mechanical) Inclinometer |
| Range                         | ± 15°  |
| Accuracy (± 5°)               | 0.03% FS / 0.004°                            |
| Accuracy full range           | 0.17% FS / 0.025°                            |
| Resolution                    | 0.001°                                       |
| Repeatability                 | 0.005°                                       |
| Axes                          | Biaxial                                      |
| Temperature sensor resolution | 0.1 °C                                       |
| Temperature sensor accuracy   | ±0.5 °C                                      |

### MEMORY


|              |                  |
|--------------|------------------|
| Date storage | 200,000 readings |
|--------------|------------------|

### PHYSICAL

|                            |                                       |
|----------------------------|---------------------------------------|
| Box dimensions (W x L x H) | 100 x 100 x 61 mm                     |
| Overall dimensions         | 150 x 120 x 61 mm (excluding antenna) |
| Operating temperature      | -40°C to 80°C                         |
| Weather protection         | IP67                                  |
| External antenna           | 100 mm length (including connector)   |
| Box material               | Aluminium alloy                       |

### RADIO

|                     |                            |
|---------------------|----------------------------|
| Range open sight    | 15km                       |
| Range urban         | > 1km                      |
| Maximum link budget | 151 dB                     |
| Configuration       | Star (no repeaters needed) |

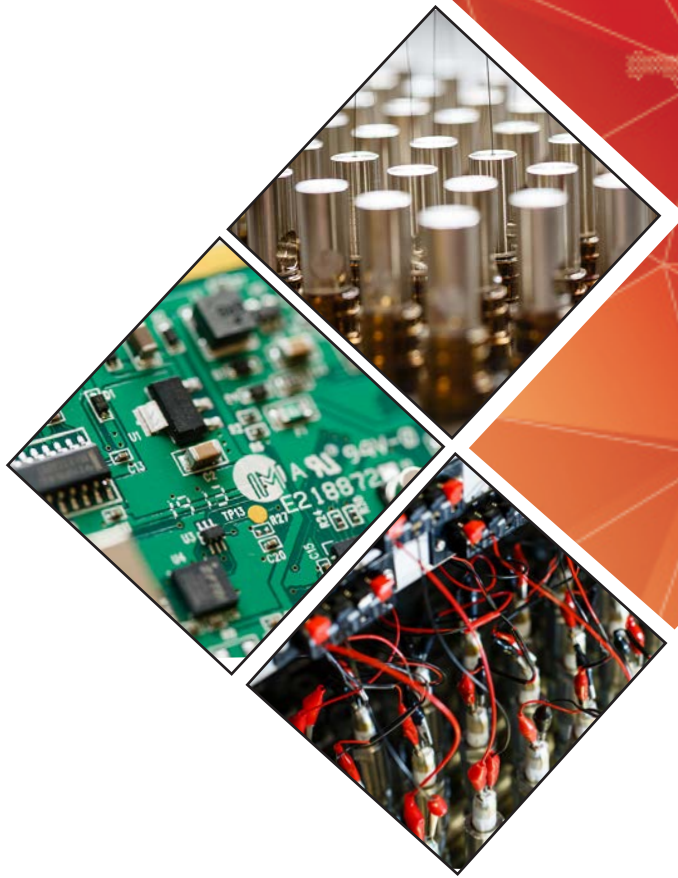

Geosense Ltd, Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England

[www.geosense.co.uk](http://www.geosense.co.uk) e [sales@geosense.co.uk](mailto:sales@geosense.co.uk) t +44(0)1359 270457