



4. Replace the lid on the battery holder and re-fit the battery holder onto the underside of the lid.



5. Close the lid and press hard on the quick-release latch.



6. The lid is now closed and fully sealed.

Geosense Ltd

Nova House. Rougham Industrial Estate. Rougham. Bury St Edmunds. IP30 9ND. UK

Tel: +44 (0) 1359 270457. Fax: +44(0) 1358 272860

email: info@geosense.co.uk. www.geosense.co.uk

QUICK GUIDE

GeoLogger Linx




The GeoLogger Linx is supplied with:

- Set of batteries (AA or C depending on model)
- A USB containing the software for use on a Windows PC
- A small screwdriver



FOR FURTHER INFORMATION PLEASE REFER TO THE LINX LOGGER INSTRUCTION MANUAL WHICH IS PART OF THE LINX SOFTWARE

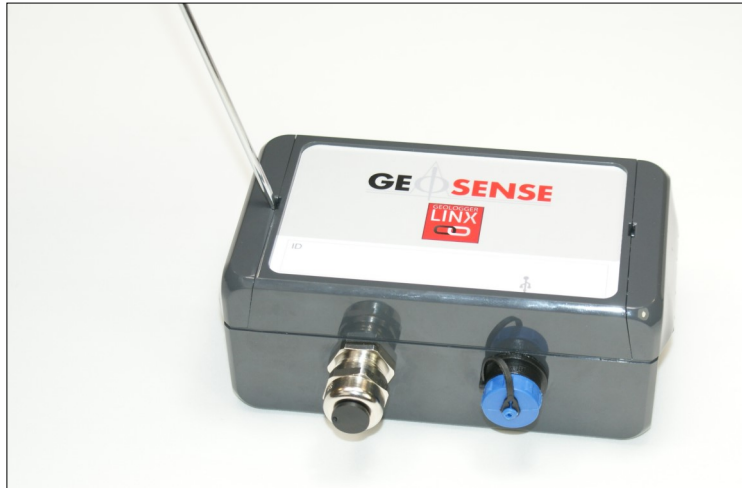

1. To open the lid on the Linx Logger place a small flat ended screwdriver (3-4mm) into the slot on the left hand side of the lid.



2. Push down hard with the screwdriver. This will open the quick-release latch



3. Remove the battery holder, undo the screw securing the lid and fit the batteries

