

## Drive-in Piezometers, VWP-3400 & SGP-3500 Series

Drive-in piezometers for measurement of pore water pressure in soft soils



# VWP-3400 & SGP-3500 Series



## Overview



Drive-in piezometers, also referred to as push-in piezometers, are designed for installing in soft clays, organic or fine grained cohesionless soils typically with a SPT-N value less than 10. They are available with a CPT fitting or 1" BSP thread.

Depending on the depth and type of soil, they can either be pushed directly into the soil from ground level to the required depth or pushed into the base of a CPT test or drilled borehole.

Installation is carried out by using CPT or conventional drill rods onto which is fitted a special adaptor that fits onto the top of the piezometer allowing it to be pushed to depth and the rods retrieved. Adaptors are available to suit most sizes and thread types of rods used for Cone Penetrometer Testing including R32 and reverse threads.

Alternatively 1" BSP galvanised pipe connected directly onto the top of a piezometer with a 1" BSP thread can be used and is sometimes used as a sacrificial pipe left within the borehole.

### APPLICATIONS

Pore water pressure in soft soils

Dams and fill embankments

Dewatering activities

Natural or cut slope sites

Deep excavations

Diaphragm walls

### FEATURES

Vibrating wire or Strain Gauge options

Robust construction

Long term stability & reliability

Anti-smearing cone design

Creates a borehole seal at top of piezometer

Built-in temperature sensor

Dynamic pore pressure monitoring  
(Strain Gauge version only)



Drive-in adaptors, pictured above, with 1" BSPM thread or plain ended can be used to connect to drill rods.

# VWP-3400 & SGP-3500 Series



## Specification

MODEL	DESCRIPTION	PRESSURE RANGE	OVER RANGE PRESSURE <sup>1</sup>	RESOLUTION	ACCURACY	NON LINEARITY <sup>2</sup>	CALIB. TEMP RANGE	THERMAL EFFECT	DIAMETER X LENGTH	WEIGHT
VWP-3400	Drive-in LAE CPT	345, 518, 690 kPa 1, 2, 3.5 MPa	1.5	0.025% FS	± 0.1% FS	<0.5% FS	-20 to +80 °C	<0.05% FS/°C	35 x 220mm	550g
VWP-3401	Drive-in LAE 1" BSPM	345, 518, 690 kPa 1, 2, 3.5 MPa	1.5	0.025% FS	± 0.1% FS	<0.5% FS	-20 to +80 °C	<0.05% FS/°C	35 x 238mm	560g
SGP-3500	Drive-in LAE CPT	350, 700 kPa 1, 3.5 MPa	1.5	0.025% FS	± 0.1% FS	<0.5% FS	-20 to +80 °C	<0.05% FS/°C	35 x 220mm	550g
SGP-3501	Drive-in LAE 1" BSPM	350, 700 kPa 1, 3.5 MPa	1.5	0.025% FS	± 0.1% FS	<0.5% FS	-20 to +80 °C	<0.05% FS/°C	35 x 238mm	560g

### VIBRATING WIRE

### STRAIN GAUGE

Signal output	Frequency & Ohms	4-20mA
Materials	316 Stainless Steel	316 Stainless Steel
Power supply	VW readout	12-24V DC
Over voltage protection	90V gas plasma arrester	-
Operating temperature range	0 to +80 °C	0 to +80 °C
Thermistor	3k Ohms @25°C	3k Ohms @25°C
Insulation	>100MΩ	>100MΩ

### CABLE TYPE

Type 900 VW sensor cable with foil screen & drain wire

Type 710 heavy duty

### FILTER TYPE

LAE (Low resistance to air entry) 50μ porous polyethylene

### ADAPTORS

A range of drive-in adaptors, including R32, are available

### ORDERING INFORMATION

Model

Cable length


Pressure Range

Cable Type

Adaptor Type

<sup>1</sup> The maximum pressure that may be applied continuously without causing damage and maintaining set point repeatability.

<sup>2</sup> ± 0.1% FS available on request.

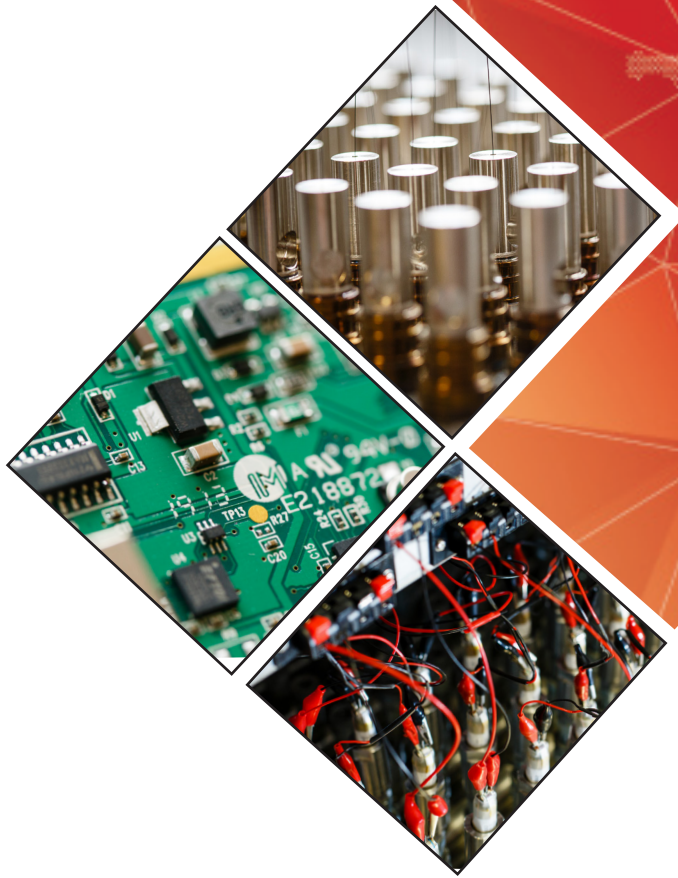

#### HEAD OFFICE

Nova House  
Rougham Industrial Estate  
Rougham, Bury St Edmunds  
Suffolk IP30 9ND  
England

+44 (0)1359 270457  
sales@geosense.com  
support@geosense.com

#### NORTH AMERICA OFFICE

15 West 38th Street  
Suite 632  
New York  
NY 10018

+1 518-920-3483  
sales@geosense.com  
support@geosense.com

[www.geosense.com](http://www.geosense.com)

Specifications are subject to change without notice and should not be construed as a commitment by Geosense. Geosense assumes no responsibility for any errors that may appear in this document. In no event shall Geosense be liable for incidental or consequential damages arising from the use of this document or the systems described in this document. All Content published or distributed by Geosense is made available for the purposes of general information. You are not permitted to publish our content or make any commercial use of our content without our express written consent. This material or any portion of this material may not be reproduced, duplicated, copied, sold, resold, edited, or modified without our express written consent.