



## Inclinometer Casing QJ (Quick Joint)

The quick connecting joint makes it faster and easier to install than traditional glue & socket inclinometer casing with external couplers and does not require any special tools or tapes



# Inclinometer Casing QJ (Quick Joint)



## Overview



Geosense® QJ Inclinometer Casing is a quick connecting casing, precision extruded from ABS, with four precise keyways formed at 90 degrees which allow accurate installation of portable and in-place inclinometers.

The quick connecting joint makes it faster and easier to install than traditional glue & socket inclinometer casing with external couplers and does not require any special tools or tapes. On deep installations the time saving is very significant.

It can be used in boreholes, fill material, cast into concrete or attached to structures and is designed to move with the ground, material or structure to provide inclination information over a period of time.

As the casing is designed to deform with movement of the ground or structure the useful life of the casing ends when the continued movement of the casing causes deformation of shear so that the inclinometer probe can no longer be placed into the casing. Larger casing generally ensures a longer life.

Where vertical settlement or heave is anticipated to be greater than 2% it is recommended to use telescopic sections to eliminate axial load on the casing which would cause excessive buckling.

A full range of accessories including bottom and top caps, anchors and groutable anchors are available and can be used in conjunction with magnetic targets for combined inclinometer/magnetic extensometers.

## APPLICATIONS

For use with inclinometer systems for monitoring stability & movement of:

Slopes

Embankments

Diaphragm & sheet piled walls

Deep foundations

Tunnelling operations

Piles

Pre-loads

Deep excavations

## FEATURES

Low spiral

Fast installation

No rivets, tape or glue

Minimises standing time

Flush connection

Available in 3 & 1.5 metre lengths

Made from 100% virgin ABS plastic

Simple to install & use

Fully compatible with all probe types

70mm diameter

Telescopic sections available

Can be combined with magnetic targets

# Inclinometer Casing QJ (Quick Joint)

## Specifications

### CASING SPECIFICATIONS

Material	100% virgin ABS (Acrylonitrile-butadiene-styrene)
Groove spiral	< 0.3°/3m
Collapse resistance	~ 2000kPa
Joint strength	186 Kgf
Torque	26Nm
Bend rating	2.6kN
Maximum temperature	+80°C
Colour	Orange (other available on request)

### CASING DIMENSIONS

Outside diameter	70mm
Inside diameter	59mm
Length (effective)	1.5 & 3 metre

### TELESCOPIC SECTION

Outside diameter	83mm
Inside diameter	59mm
Telescopic range	150mm
Length	500mm

### WEIGHTS


Casing	1.27kg/m
Telescopic section	1.6kg
Top cap	20g
Bottom plug	168g

### ACCESSORIES

Standard Anchor	70mm
Grout Anchor	70mm
Grout Cap	70mm

# Inclinometer Casing QJ (Quick Joint)

## Casing Accessories



### ACCESSORIES

Casing Accessories include, above from left, Reed Switch Probe Centraliser & Tape Guide, Top & Bottom Caps and Suspension Clamps. Also available: Repair Coupling & Alignment Tool.



### ANCHORS

Inclinometer Casing Anchors are fixed to the bottom of the casing prior to installation to prevent uplift, usually due to buoyancy forces of water or grout. As soon as the anchor exits the bottom opening of the drill rod/borehole, the spring-loaded arms of the anchor are automatically extended to grip the borehole wall.

A Grouting version of the anchor is available and Magnetic Targets can also be integrated.

### ORDERING INFORMATION

Diameter


Length

Telescopic sections

Bottom cap

Top cap

Anchor type

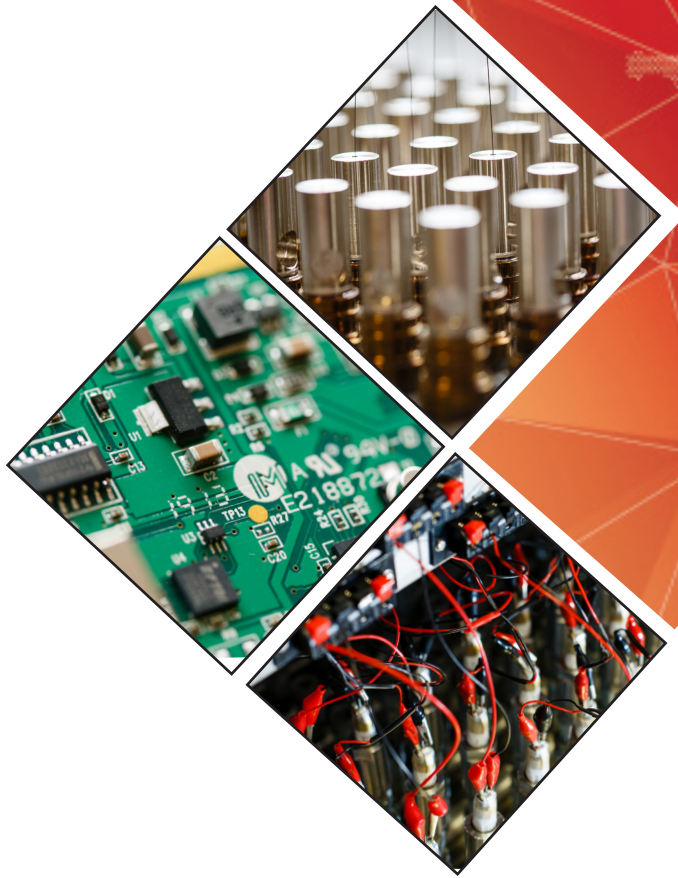

#### HEAD OFFICE

Nova House  
Rougham Industrial Estate  
Rougham, Bury St Edmunds  
Suffolk IP30 9ND  
England

+44 (0)1359 270457  
sales@geosense.com  
support@geosense.com

#### NORTH AMERICA OFFICE

15 West 38th Street  
Suite 632  
New York  
NY 10018

+1 518-920-3483  
sales@geosense.com  
support@geosense.com

[www.geosense.com](http://www.geosense.com)

Specifications are subject to change without notice and should not be construed as a commitment by Geosense. Geosense assumes no responsibility for any errors that may appear in this document. In no event shall Geosense be liable for incidental or consequential damages arising from the use of this document or the systems described in this document. All Content published or distributed by Geosense is made available for the purposes of general information. You are not permitted to publish our content or make any commercial use of our content without our express written consent. This material or any portion of this material may not be reproduced, duplicated, copied, sold, resold, edited, or modified without our express written consent.